

AIRE™ PEBBLED

Product Specifications

Application

Upholstery

Contents

Top - Polyurethane (polycarbonate), Breathable

Back - Polyester / Rayon

Width

54"

Nominal Thickness

36/38 gauge

Repeat

N/A

Roll Length

App. 40yds

General Characteristics

Superior wear resistance : Exceeds 200,000 double rubs (Wyzenbeek)†

Hydrolysis Resistance : 10+ weeks

- ISO1419:1995, Method C, Tropical Test

Silicone does not support microbiological growth

Colorfastness to light (AATCC-16/200 hours)

Colorfastness to crocking (AATCC-8)

Excellent breaking strength (ASTM D5034)

Excellent tear strength (ASTM D2262)

Adhesion of Coating (ASTM D751)

Stretch & Set (SAE J855)

Flammability ††

CA Bulletin 117-2013, UFAC/NFPA 260-Class 1

IMO A652 (16) 8.2, MVSS-302

Pure Green

Naturally breathable for cozy comfortness and luxurious soft touch

PVC free, Phthalate free, Heavy Metals Free

Care & Cleaning***


Cleaning Code : W/S, Bleach Cleanable (5:1)

Warranty

Please refer to our Terms of Sales for warranty information.

† Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

†† This term and any other corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

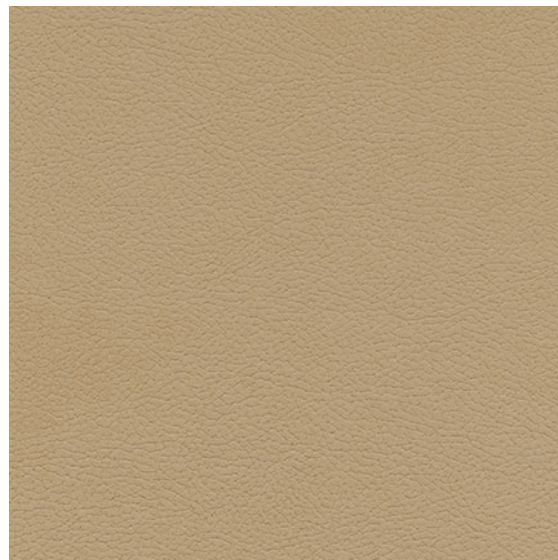

Ridge

