

SKINTEX SI VENUE

Product Specifications

Application

Upholstery

Contents

Top - 100% Silicone, inherently Graffiti-Free™

Middle - 100% Polyurethane

Back - 100% Reinforced Pollex™

Width

54"

Repeat

N/A

Roll Length

App. 40yds

General Characteristics

Superior wear resistance : **500,000 double rubs** (Wyzenbeek)†

Hydrolysis Resistance : 10+ weeks

- ISO1419:1995, Method C, Tropical Test

Silicone does not support microbiological growth

Colorfastness to light (AATCC-16/200 hours)

Colorfastness to crocking (AATCC-8)

Meets or exceeds all ACT Heavy Duty Performance Guidelines for Upholstery

Excellent breaking strength (ASTM D5034)

Excellent tear strength (ASTM D2262)

Adhesion of Coating (ASTM D751)

Stretch & Set (SAE J855)

Flammability ††

CA Bulletin 117-2013

UFAC/NFPA 260-Class 1

IMO A652 (16) 8.2


Care & Cleaning*

W/S, Bleach Cleanable (4:1), Dry Care™

Warranty

Please refer to our Terms of Sales for warranty information.

*While this product offers excellent protection against ink marks or difficult stains, full removal is not always guaranteed, if stains not addressed promptly.

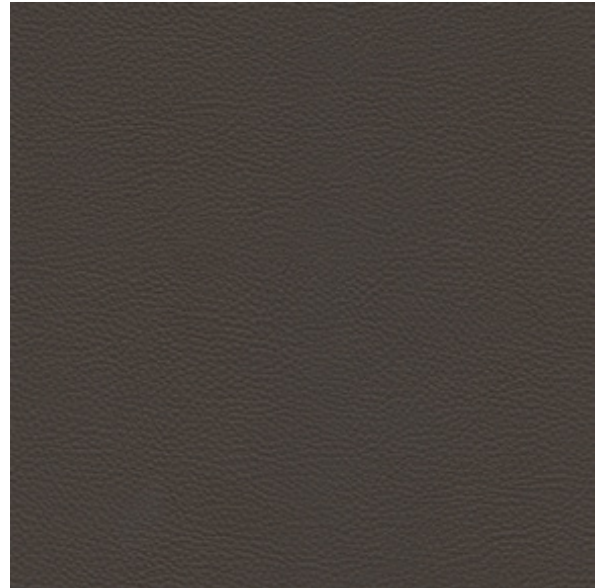

Mink



† Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

†† This term and any other corresponding data refer to typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.