


SPECIFICATIONS

Abrasion	1,500,000 Double Rubs (Wyzenbeek)
After Treatment Finish	Stock Finished with Endurepel Armour
Brand	CHALLENGER
Catalogue	This product is on page 137 of the Ennis Supply Catalogue Edition.
Construction	Polyvinyl Chloride Coated Faux Leather Fabric
Content Face	100% Vinyl
Crocking	AATCC 8: Dry crocking = Class 5
Fire Retardancy	BS EN 1021-1: 2006 - Part 1. Cigarette Test, BS EN 1021-2: 2006 - Part 2. Match Flame Test, IMO FTP 2010 Code MSC.307(88), Part 8, 3.1 & 3.2, MVSS302, CALTB117-2013, NFPA 260 Class 1, UFAC Class 1
Number of Colors	Available in 40 colors
Railroaded	Non Railroaded
Roll Size	30 yds (27 m)

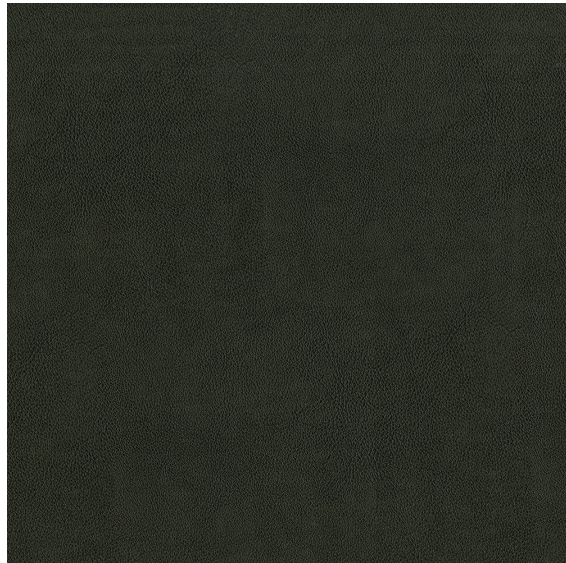

Product Description

Challenger 98 Charcoal is the next generation of PVC performance in a dark, two tone grey color. It features a buttery soft hand, Endurepel Armour performance finish, and excellent durability.

Cleaner Disclaimer

Dilution ratios must be followed. Materials must be wiped with clean water after use to remove any cleaning residue and wiped dry with a clean cloth.

Cleaners Approved

Cleanable with Bleach
Cleanable with Diluted 1 Accel Five TB.
Cleanable with Diluted 1 Virox 5.
Cleanable with Diluted 1 Oxiver Plus
Cleanable with Diluted 1 Oxiver TB Plus
Cleanable with Diluted 1 Accel Concentrate
Cleanable with Diluted 1 test footer

SPECIFICATIONS

Isopropyl Alcohol Cleanable with
Clorox Disinfecting Wipes
Cleanable with Diluted 1 Oasis
146

Cleaning Code

W - Clean fabrics with water-
based cleaning agents or water
based foam

Industry

Contract Fitness Healthcare
Hospitality Marine OEM Office
Seating Residential RV
Transportation

Uses

Automotive Seating, Bags,
Decorative Accessories,
Healthcare Seating, Hospitality
Seating, Marine Seating, Office
Seating, Residential Seating, RV
Seating

Seam Slippage

ASTM D751 Fill 64 X
Warp 67 lb

Tensile Strength

Passes ASTM D751 -
Weft 94 x Warp 101

Weight

736 gsm

Width

54 in. (137 cm)

Warranty

Challenger fabrics
have a limited 3-year
fabric warranty
against becoming
unservicable due to
loss of colour, loss of
strength, abrasion
and pilling from
normal usage and
exposure conditions

Proposition 65

This product is
Proposition 65
compliant