

NAUTOLEX

PERFORMANCE MARINE UPHOLSTERY

Cetacea



White Wave
529115



Sand Dollar
520989




Soft Sand
520990




Porpoise
520988




Jute
529091

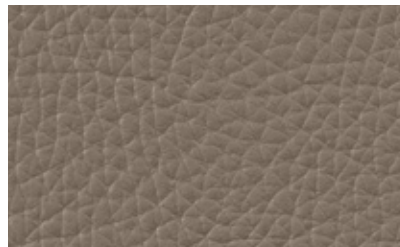


Silt
529114

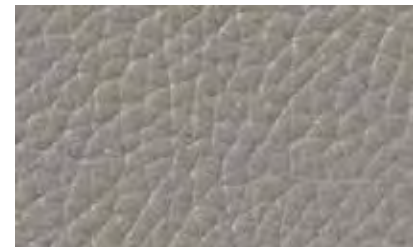

Manatee
529113

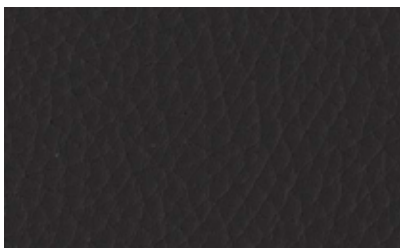

 Charcoal Black
544234

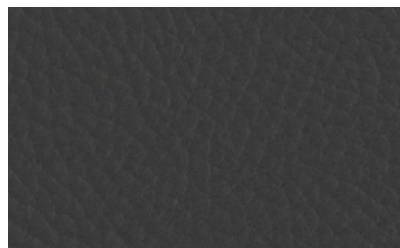


 Slate
544235

NAUTOLEX®

PERFORMANCE MARINE UPHOLSTERY

Cetacea

Typical Properties

Content	100% vinyl face, polyester filament knit backing Colors marked with  are made with CoolComfort technology to reduce seat temperature and increase comfort. Formulated without PFAS (Per- and Polyfluoroalkyl Substances) Chemicals Formulated with EU and EPA FIFRA registered and approved biocides
Finish	PreFixx® Protective Finish
Width - inches	54
Roll Size - linear yards	40
Weight - oz. / per linear yard	30

Performance Requirements

Meets or exceeds ACT Performance Guidelines

CFFA Healthcare 201 Certified

Abrasion Resistance (CFFA-1a) - cycles

Wyzenbeek stainless steel wire screen	60,000
Cotton duck abradant	1,300,000

Mildew Resistance (ASTM G-21)

Cold Crack - °F -20

U.V. Resistance (CFFA-2)

- Hours outdoor 650

Flame Retardant Rating

- BIFMA, Class A	Pass
- California Technical Bulletin 117-2013, Section 1	Pass
- NFPA 260, Class 1	Pass
- UFAC Fabric, Class 1	Pass



Applications

Interior/Exterior

Though our upholsteries can be used in many applications, customers are responsible for selecting an upholstery with attributes that meet the requirements of the specific end-use application – not all upholstery is suitable for all applications.

Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be a reliable indicator of increased fabric lifespan.

Nautolex® products are easily cleaned.