


Crypton Denali

CRYPTDENAL303 - 303 Storm

SPECIFICATIONS

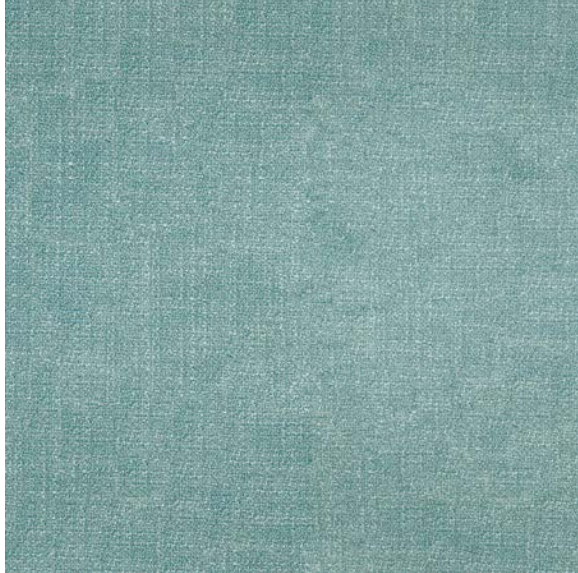

Product Description

Crypton barrier treated chenille/boucle crepe weave with subtle shine.

Cleaning Code

W - Clean fabrics with water-based cleaning agents or water based foam

Abrasion	100, 000 Double Rubs (Wyzenbeek)
After Treatment Finish	Stock Finished with Crypton
Brand	Crypton
Construction	Woven Plain
Content Backing	Crypton
Content Face	94% Polyester, 5% Linen, 1% Nylon
Crocking	ASTM D3597: Dry crocking = Class 4.5
Fire Retardancy	CALTB117-2013, NFPA 260 Class 1, UFAC Class 1
Number of Colors	Available in 9 colors
Railroaded	Non Railroaded
Roll Size	55 yds (50 m)
Seam Slippage	ASTM D4034 Fill 82.5 X Warp 86.5 lb
Weight	24.5 oz/sq yd, 38.8 oz/yd, 831 gsm
Width	55 in. (142 cm)
Style	Solid
Proposition 65	This product is Proposition 65 compliant

SPECIFICATIONS

Pilling	ASTM D3511 - Class 4
Social Responsibility	This product is sourced through a socially compliant vendor who has met our sustainability criteria.
Sustainable Manufacturing	Sustainable energy usage in the manufacturing process., Sustainable water usage in the manufacturing process.
Industry	Contract, Residential, Office Seating
Uses	Upholstery, Hospitality Seating, Pillows, Residential Seating, Upholstery, Healthcare Seating, Indoor Seating, Office Seating, Spa Industry