

AIRE™ SI ERA

Product Specifications

Application

Upholstery

Content

Top - Silicone
Middle - 100% Polyurethane
(CPU - Clean Performance Urethane)

Backing

100% Polyester

Width

54"

Repeat

N/A

General Characteristics

Abrasion : 500,000+ double rubs (Wyzenbeek)
Hydrolysis Resistance : 15+ weeks (ISO 1419 Tropical Test)
Silicone does not support microbiological growth
Colorfastness to Light (AATCC-16/200 hours)
Colorfastness to Crocking (AATCC-8)
Excellent Breaking (ASTM D5034) &
Tearing Strength (ASTM D2261)
Meets or Exceeds all ACT Heavy Duty Performance
Guidelines for Upholstery

Flammability

CA Bulletin 117-2013, UFAC/NFPA-260, IMO A.652 (16) 8.2

Environmental


PFAS Free, Solvent/DMF-Free, PVC/Phthalates Free,
FR/Anti-Microbial Additives Free
*Complies with REACH, Prop 65 &
California 01350 VOC Emission Standard

Maintenance*

W/S, Bleach (10:1)

Warranty

Please refer to our Terms of Sales for warranty information.

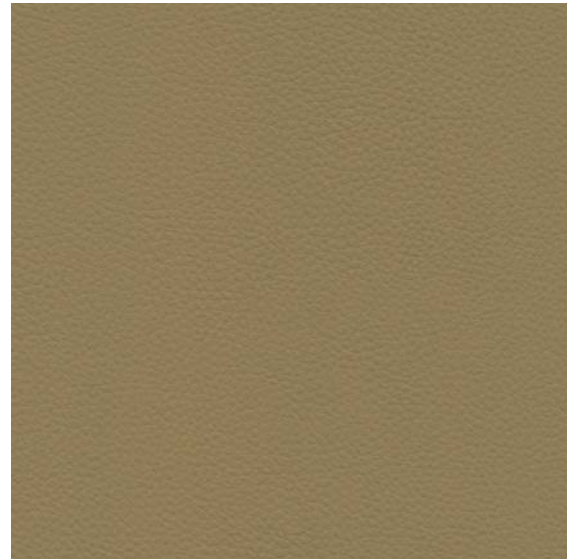

Sandbox



* While this product offers excellent protection against ink marks or difficult stains, full removal is not always guaranteed, if stains not addressed promptly.

† Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.