


SPECIFICATIONS

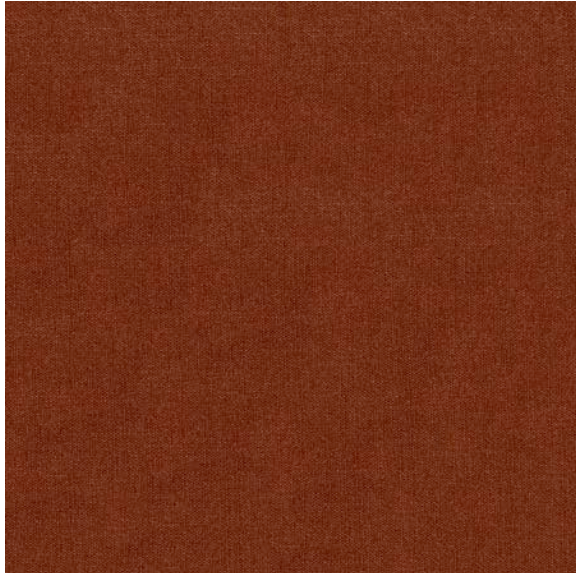

Product Description

Pace 1006 Rust is brushed hopsack plain with soft hand and show in our subtle red tone.

Cleaning Code

SW - Clean fabrics with water-based cleaning agents

Abrasion	200, 000 Double Rubs (Wyzenbeek)
After Treatment Finish	Stock unfinished. After treatment available with Endurepel Shield.
Construction	Woven Plain
Content Backing	100% Polyester
Content Face	100% Polyester
Crocking	CFFA 7 Federal Standard 191A M 5551: Dry crocking = Class 5
Fire Retardancy	CALTB117-2013, NFPA 260 Class 1
Number of Colors	Available in 15 colors
Railroaded	Non Railroaded
Roll Size	55 yds (50 m)
Seam Slippage	ASTM D4030 Fill 95 X Warp 96 lb
Tensile Strength	Passes ASTM D5034 - Weft 293 x Warp 325
Weight	338.9 gsm, 15.2 oz/yd, 10 oz/sq yd
Width	57 in. (144 cm)
Warranty	Full warranty of 2 years

SPECIFICATIONS

Proposition 65	This product is Proposition 65 compliant
Pilling	ASTM D3512 - Class 4
Industry	Residential, Contract
Uses	Bedding, Decorative Accessories, Office Seating, Pillows, Residential Seating