

GALLERIA™ SISAL

Product Specifications

Application

Upholstery

Content

100% Phthalate Free Vinyl

Finish

Resist™

Backing

100% Polyester

Width

54"

Repeat

N/A

General Characteristics

Abrasion : 300,000+ Double Rubs (Wyzenbeek)†

Lightfastness : 1,000+ hours, QUV Test

Anti-Mildew (ASTM G21)

Cold Crack Resistance (CFFA 6a) -10°F

Colorfastness to Perspiration (AATCC 15) Grade 5

Colorfastness to Chlorinated Water (AATCC 162) Grade 5

Colorfastness to Sea Water (AATCC 106) Grade 5

Free of hydrolysis concern

Will Not Degrade from Moisture.

Soft, Subtle Hand with Exceptional Performance.

Meets or exceeds all ACT Heavy Duty Performance Guidelines for Upholstery

Flammability


CA Bulletin 117-2013, UFAC/NFPA-260,
IMO A652 (16) 8.2 & 8.3

Environmental


Phthalate Free, Heavy Metals Free,
FR Additives Free

Maintenance

W/S, Bleach (10:1)

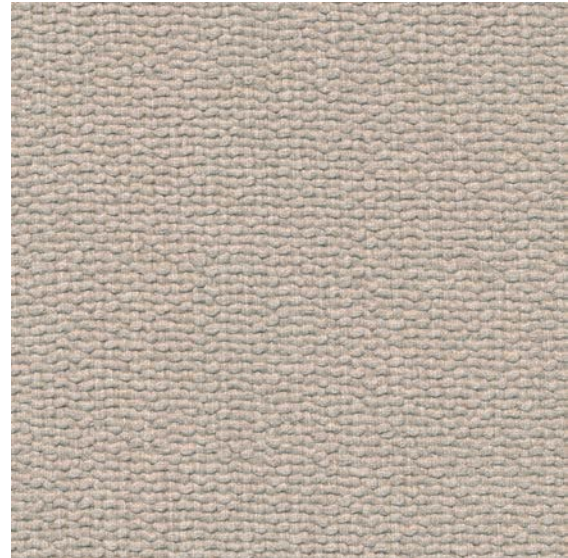

Merino

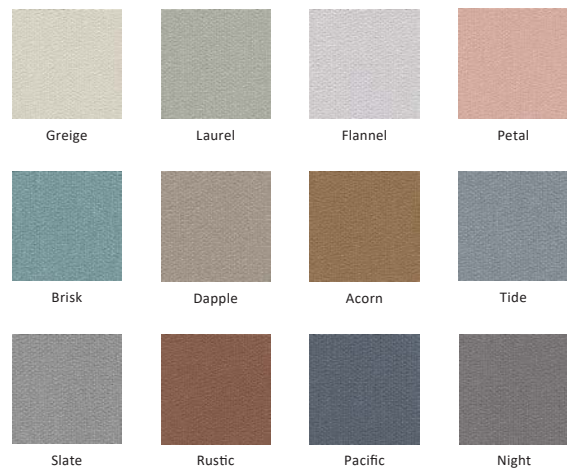

† Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.