


Pattern Detail and Specifications

Yosemite

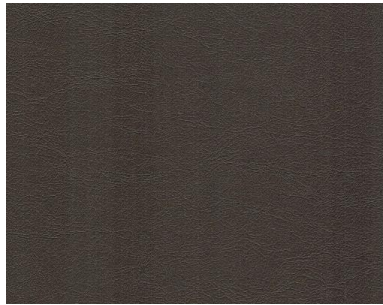

**Specifications:**

content: 100% Polyurethane  
backing: 70% Polyester; 30% Cotton  
finish: Antimicrobial  
Repeat: n/a  
weight: 22.12 oz. / lin. yd.  
width: 54 inches

**Flammability Passes:**

California Tech. Bulletin #117-2013  
UFAC Class 1  
NFPA 260 Class 1

MVSS 302

**Performance:**

abrasion: Heavy Duty – Exceeds 100,000 cycles  
(Wyzenbeek – Wire screen Abradant) (ASTM D4157)  
light fastness: Class 4/40 hrs. min. (AATCC16A)  
color fastness: Class 4 (ASTM D3597, AATCC 8) Wet  
Class 4 (ASTM D3597, AATCC 8) Dry  
physical properties: Class 4 (ASTM D3511) Brush Pill  
85 lbs. warp, 81 lbs. weft (ASTM D5034) Breaking Strength  
61 lbs. warp, 68 lbs. weft (ASTM D4034) Seam Slippage  
50,000 cycles (CFFA 10) Flex Resistance  
Pass (CFFA 6a) Cold Crack  
Pass (ISO 1419) 5 weeks  
environmental benefits: PVC free  
made in: China

**Care & Cleanability:**

A clean cloth, dampened with the appropriate cleaning solution, should be applied to the affected areas as soon as possible. Blot the fabric with the treated cloth, working from the outer edge of the stained area and moving in toward the center. In order to effectively draw out the stain, renew the cleaning cloth as often as necessary to maintain an absorbent surface.

Clean all stained areas as soon as possible in accordance with the recommended stain removal procedures. Spot clean with upholstery shampoo, foam from a mild detergent, or mild dry cleaning solvent. Hot water extraction or steam cleaning is not a recommended cleaning method. Clean spots or stains from the outside to the middle of the affected area to prevent circling (see Stain Removal Matrix below).

1. Soap and water
2. Difficult stains use Fantastik® or Formula 409®
3. Disinfects with 5:1 water / bleach solution